


# SOPRASEAL<sup>®</sup> XPRESS G

Gypsum Board and Air Barrier

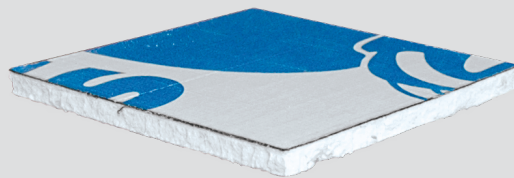

APPLICATIONS

WALLS

## DESCRIPTION:

**SOPRASEAL Xpress G** is an exterior grade, inorganic faced gypsum board with an air, vapor and water barrier factory applied to the exterior surface.

## BASIC USES:

**SOPRASEAL Xpress G** is an all-in-one sheathing, and air & vapor barrier that is installed in one step with SOPRASEAL Xpress G Screws.

## PACKAGING:

4' x 8' boards in 1/2" or 5/8" thickness and 32 boards per pallet

## COVERAGE RATE:

32 square feet

## LIMITATIONS:

- Material is not designed for horizontal waterproofing.
- Exposed gypsum edges must be protected from water and exposure immediately after installation.
- Installed Xpress G can be exposed during construction for up to 90 days.
- Any delamination due to overexposure must be repaired before covering.

## APPLICATION:

Refer to the **SOPRASEAL Xpress G** application guidelines for complete details.

## WARRANTY:

Please refer to [www.SOPREMA.us](http://www.SOPREMA.us) for the SOPREMA<sup>®</sup> Standard Warranty, Form 115, or contact SOPREMA at 800.356.3521 for more information.

PROPERTY	VALUE	TEST METHOD
Water vapor transmission, perms (ng/Pa•s•m <sup>2</sup> )	0.019 (1.1)	ASTM E96 (Procedure B)
R-value	0.4	ASTM C518
Air leakage resistance	Pass	ASTM E2357
Pull adhesion, psi (kPa)	23 (160)	ASTM D4541
Fastener sealability	Pass	ASTM D1970
Water resistance	Pass	AATCC 127
Air permeance @ 75 Pa, cfm/ft <sup>2</sup> (L/s•m <sup>2</sup> )	0.0016 (0.0083)	ASTM E2178
Fire resistance	Pass	NFPA 285

\* Data is represented by average values, unless noted otherwise.

