


# SOPRA-ISO® PLUS

Rigid Polyisocyanurate Thermal Insulation Panel



APPLICATIONS

ROOFING

PRODUCT DATA SHEET PDS10309 - REV 230926

## PRODUCT NUMBERS:

For ordering information contact customer service.

## DESCRIPTION & FEATURES:

- SOPRA-ISO PLUS** is a rigid polyisocyanurate thermal insulation board used in approved multi-ply membrane assemblies. **SOPRA-ISO PLUS** comprises a closed-cell polyisocyanurate foam core bonded to polymer-coated glass fiber-reinforced facers.
- Available in two grades of compressive strengths per ASTM C1289 Type II, Class 2 Grade 2 (20 psi) or Grade 3 (25 psi)
  - Available in 4 ft x 4 ft (1.2 m x 1.2 m) and 4 ft x 8 ft (1.2 m x 2.4 m) panels in thicknesses of 1 in (25.4 mm) to 4.0 in (101.6 mm)
  - Has the highest R-value per inch compared to any other type of non-polyiso insulation of equivalent thickness
  - Lightweight and easy to handle, can be cut with a utility knife or saw
  - Compatible with most construction adhesives, roof and wall coverings and attachment systems
  - Manufactured using CFC-free, HCFC-free, and HFC-free foam blowing technology with zero ozone depletion potential (ODP) and virtually no global warming potential (GWP)

## APPLICATION:



URETHANE  
ADHESIVE



MECHANICALLY  
FASTENED



HOT  
ASPHALT

Prior to installation, ensure all **SOPRA-ISO PLUS** panels have not been subject to moisture. Butt edges and stagger joints of adjacent panels. Secure boards to substrate using mechanical fasteners, insulation adhesive or hot asphalt. For approvals and listings to meet project-specific wind rating requirements, contact SOPREMA.

Refer to the SOPREMA Low-Slope Roofing Insulation Technical Manual for complete application guidelines.

## STORAGE:

Store board flat on a raised pallet to prevent damage. Store in a clean, dry location and cover as necessary to protect from environmental damage such as extreme cold, heat or moisture. The factory packaging is intended for the protection of the boards during transit and is not intended for job site protection. When product is stored outdoors, the plastic shroud must be slit and the insulation protected by a waterproof, breathable covering such as a tarpaulin.

## LIMITATIONS:

Do not apply flame directly to **SOPRA-ISO PLUS** when installing a torch-applied modified bitumen system. This product will burn if exposed to an ignition source of sufficient heat and intensity.

DO NOT LEAVE EXPOSED. Install only as much **SOPRA-ISO PLUS** as can be covered in the same day.

## TESTING & APPROVALS:



FLORIDA BUILDING CODE

FL17989


MIAMI-DADE COUNTY  
APPROVED

NOA # 20-0908.05



# SOPRA-ISO® PLUS

Rigid Polyisocyanurate Thermal Insulation Panel

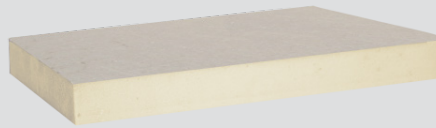

APPLICATIONS

ROOFING

PRODUCT DATA SHEET PDS10309 - REV 230926

## TECHNICAL INFORMATION & TESTING:

SHEET PROPERTIES	
PROPERTY	VALUE
<b>Material</b>	Closed-cell polyisocyanurate foam core
<b>ASTM</b>	C1289, Type II Class 2
<b>Surfacing</b>	Polymer-coated glass fiber-reinforced facer
<b>Length, ft (m)</b>	4 (1.2), 8 (2.4)
<b>Width, ft (m)</b>	4 (1.2)
<b>Thickness, in (mm)</b>	1 - 6 (25 - 152)*

\* Other thicknesses available upon request.

PHYSICAL PROPERTIES*		
PROPERTY	VALUE	ASTM
<b>Compressive strength, psi (kPa)</b>	Grade 2 - 20 (138) Grade 3 - 25 (172)	D1621
<b>Linear dimensional stability, %</b>	< 0.5	D2126
<b>Tensile strength, lb/ft² (kPa)</b>	> 730 (35)	D1623
<b>Density, lb/ft³ (kg/m³)</b>	2.0 (32)	D1622
<b>Water absorption, %</b>	< 1.0, < 3.5	C209/ D2842
<b>Flame spread**</b>	40 - 60	E84
<b>Service temperature, °F (°C)</b>	-100 to 250 (-73 to 122)	-

\* Data is represented by average values, unless noted otherwise

\*\* The numerical ratings as determined by ASTM Test Method E84 are not intended to reflect hazards presented by this or any other material under actual fire conditions.

## STANDARD THICKNESSES & THERMAL VALUES

NOMINAL THICKNESS		RIC/TIMA 1		METAL DECK FLUTE SPANABILITY	
INCHES	MILLIMETERS	LTTR-VALUE**	RSI***	INCHES	MILLIMETERS
1.0	25.4	5.7	1.00	2.625	66.68
1.5	38.1	8.6	1.50	4.375	111.13
2.0	50.8	11.4	2.01	4.375	111.13
2.5	63.5	14.4	2.53	4.375	111.13
3.0	76.2	17.4	3.06	4.375	111.13
3.5	88.9	20.5	3.60	4.375	111.13
4.0	101.6	23.6	4.15	4.375	111.13

\*\* LTTR (long-term thermal resistance) values were determined in accordance with CAN/ULC-S770-09. Test samples were third party selected and tested by an accredited material laboratory. The LTTR results were reviewed by FM Global and certified by the PIMA Quality Mark Program.

\*\*\* RSI is the metric expression of R-value (m²·K/W)

## SUSTAINABILITY:



RECYCLED CONTENT	OZONE DEPLETION POTENTIAL (ODP)	ENVIRONMENTAL PRODUCT DATA (EPD)*	HEALTH PRODUCT DECLARATION (HPD)*
Varies with thickness, refer to LEED product sheet	0	Yes	Yes

\* EPD and HPD sheets are available at [soprema.us](http://soprema.us)

## WARRANTY:

For more information refer to [www.SOPREMA.us](http://www.SOPREMA.us) or contact your SOPREMA representative.



**SOPREMA®**

SOPREMA.US • 1.800.356.3521

SOPREMA.CA • 1.877.MAMMOUTH