

PRODUCT DATA SHEET

DESCRIPTION & FEATURES


SENTINEL PVC Pipe Flashings are manufactured from fiberglass reinforced PVC membrane and feature a split design to fit around protrusions up to 6 inches (15.2 cm) in diameter.

STORAGE

All materials must be stored in a clean, dry location and cover as necessary to protect from environmental damage such as extreme cold, heat or moisture. Monitor varying environmental conditions during storage, handling and application.

APPLICATION

SENTINEL PVC Pipe Flashings are hot-air welded to the field membrane. Seal the top of the pipe flashing watertight with mastic and a pipe clamp (included). Refer to SOPREMA's specifications and installation instructions for additional application guidelines.

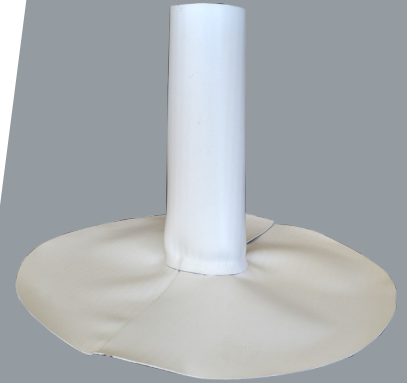

QUICK FACTS

DIAMETER (in)	HEIGHT (in)	THICKNESS (mils)	PIECES/CARTON
1 to 6 (2.5 to 15.2 cm)	8 (20 cm)	60 (1.5 mm)	8 pieces

PACKAGING

SKU #	PRODUCT	DESCRIPTION	PACKAGING
P601	SENTINEL PVC Pipe Flashing - 1 in (2.5 cm)	Fits pipes up to 1 in diameter	8 per carton
P602	SENTINEL PVC Pipe Flashing - 2 in (5.1 cm)	Fits pipes 1 in to 2 in diameter	8 per carton
P603	SENTINEL PVC Pipe Flashing - 3 in (7.6 cm)	Fits pipes 2 in to 3 in diameter	8 per carton
P604	SENTINEL PVC Pipe Flashing - 4 in (10.2 cm)	Fits pipes 3 in to 4 in diameter	8 per carton
P605	SENTINEL PVC Pipe Flashing - 5 in (12.7 cm)	Fits pipes 4 in to 5 in diameter	8 per carton
P606	SENTINEL PVC Pipe Flashing - 6 in (15.2 cm)	Fits pipes 5 in to 6 in diameter	8 per carton

