

GEOTEXTILE FILTER FABRIC EXTEND  
12" MIN. ONTO HORIZONTAL PLANE.

MESH SCREEN & DRAIN STRAINER.

(1) PLY SOPREMA ALSAN RS  
MEMBRANE FLASHING—EXTEND  
MINIMUM OF 4" (10cm) INTO  
PREPARED AND PRIMED  
DRAIN BOWL.

SOPREMA ALSAN RS FIELD  
MEMBRANE EXTENDED 4" MIN.  
(10cm) OVER DRAIN FLASHING.


PREPARE, LEVEL & PATCH SUBSTRATE  
W/ ALSAN RS PASTE OR ACCEPTABLE  
PATCHING MORTAR PRIOR TO  
APPLICATION OF SOPREMA ALSAN RS  
PRIMER & MEMBRANE (TYP.)

SOPREMA ALSAN RS TARGET FLASHING  
EXTENDED FROM EDGE OF DRAIN BOWL  
ONTO PREPARED & PRIMED SUBSTRATE.

SOPREMA ALSAN RS RESIN/SAND FILL AS  
REQUIRED TO DEVELOP SMOOTH TRANSITION.


DRAIN CLAMPING RING

ACCEPTABLE PLANTER DRAIN ASSEMBLY PREPARE & PRIME DRAIN  
BOWL AS REQ'D. FOR SOPREMA ALSAN RS MEMBRANE  
APPLICATION.

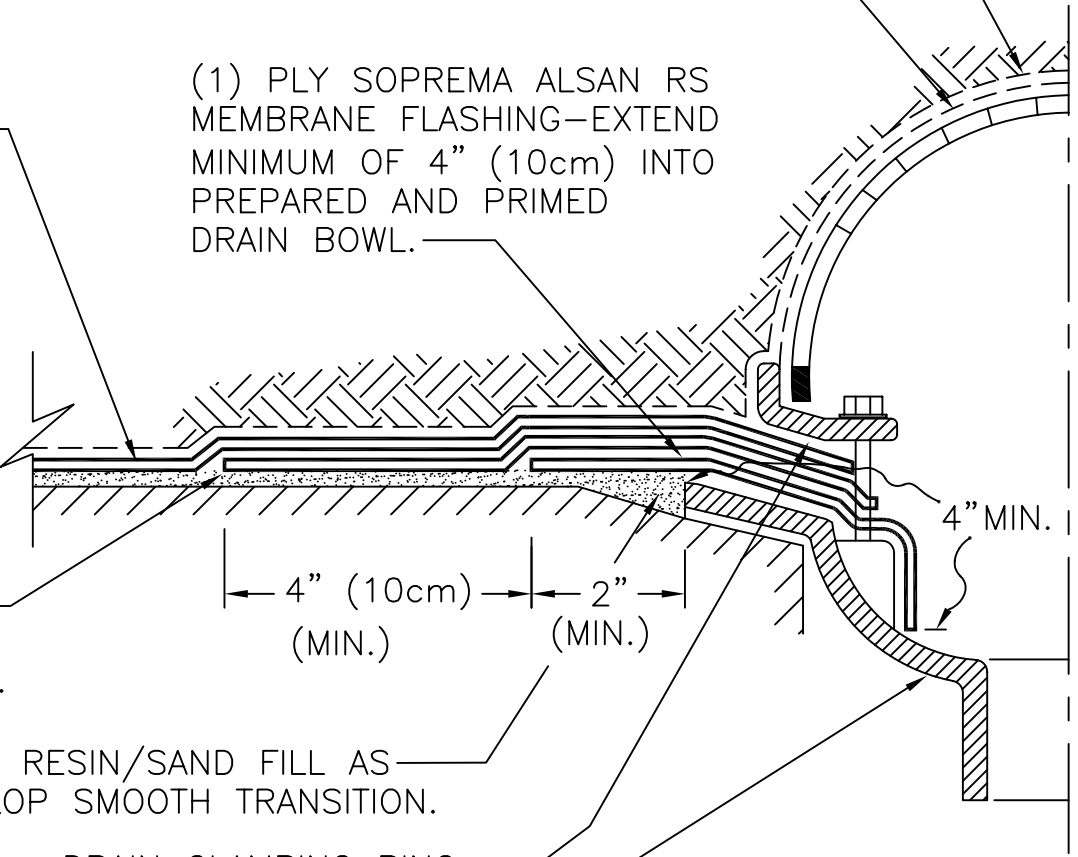

NOTES:

- 1. DETAIL TO BE USED IN CONJUNCTION WITH SOPREMA GENERAL REQUIREMENTS, APPLICATION METHODS AND APPROVED DETAILS.

		310 QUADRAL DRIVE	
		WADSWORTH, OHIO 44281	
		(330) 334-0066	
TITLE PLANTER DRAIN FLASHING DETAIL			
SCALE NONE	DWN DMT	CHK MT	APPROVAL DATE 5/30/07
DRAWING NUMBER D-6-RS			REV 0

\*\* USAGE OF THIS DRAWING IS GOVERNED BY THE TERMS OF SERVICE FOR SOPREMA DETAIL. PLEASE CONSULT THESE TERMS OF SERVICE PRIOR TO UTILIZING THIS DRAWING.