


ISOMETRIC VIEW

NOTE:
 ALSAN TRAFIK RS FLASH MEMBRANE MAY BE APPLIED DIRECTLY TO PIPES, CONDUITS, OR SURFACES THAT HAVE 150°F OR LESS CONT. OR INTERMITTENT SERVICE TEMPERATURE.

AFTER INSTALLATION OF ALSAN TRAFIK RS FLASHING, PAINT EXPOSED FERROUS METALS TO INHIBIT CORROSION.

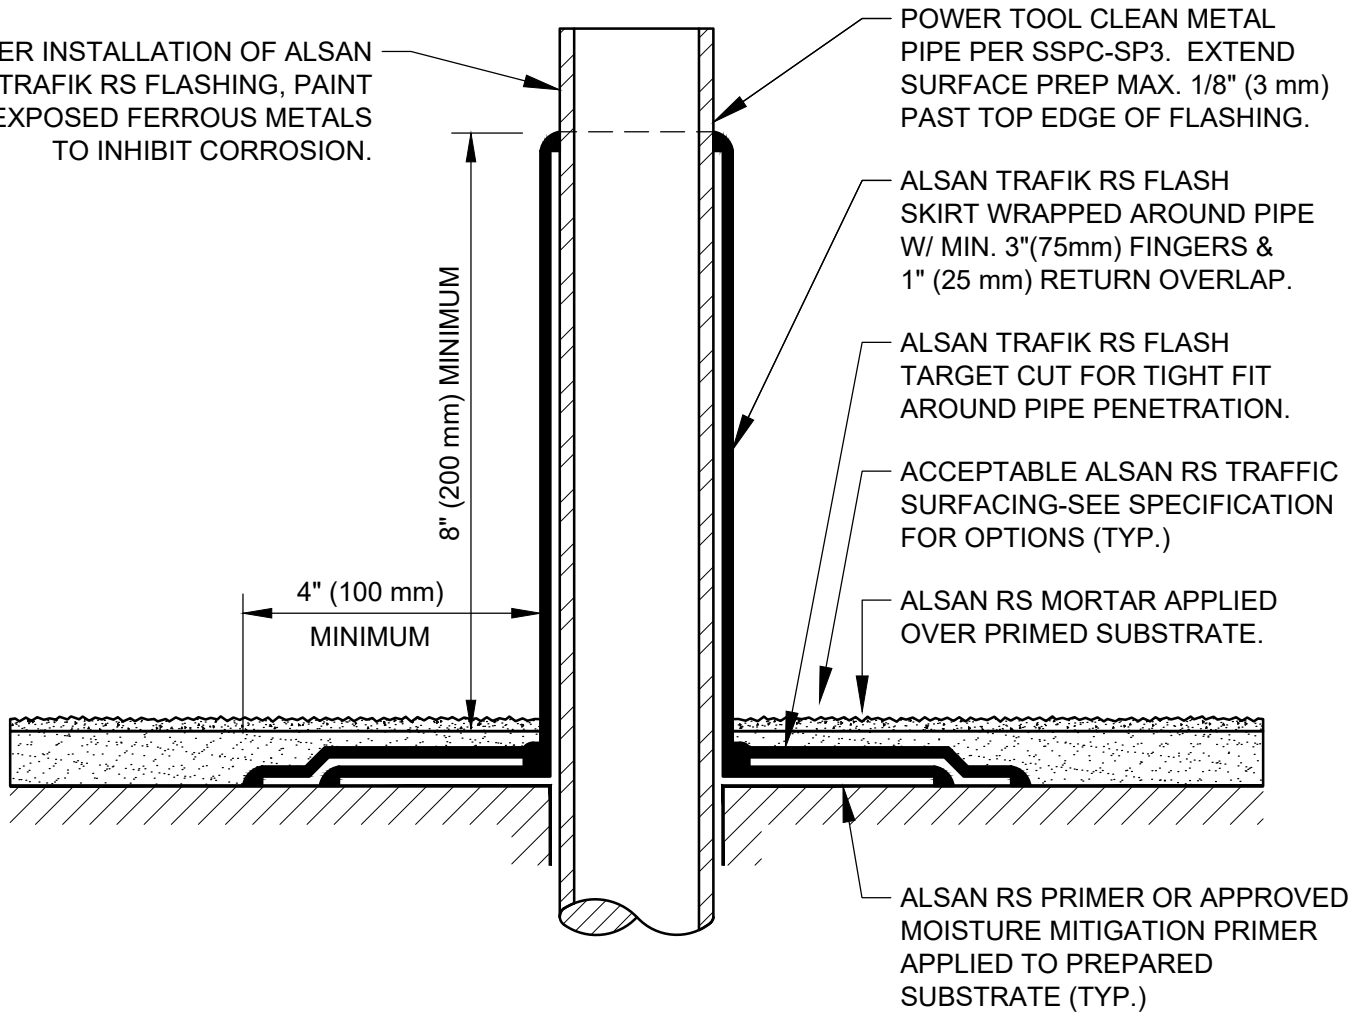

SOPREMA DETAIL DRAWINGS: REFER TO SOPREMA AND OTHER RELATED PUBLISHED DOCUMENTATION, PRODUCT DATA SHEETS (PDS) AND SAFETY DATA SHEETS (SDS) FOR ADDITIONAL INFORMATION. ALL DETAIL DRAWINGS AND RELATED INSTALLATION GUIDELINES ARE PROVIDED BY SOPREMA FOR THE SOLE PURPOSE OF ISSUING A SOPREMA WARRANTY. ACCORDINGLY, THE DETAIL DRAWINGS ARE NOT OFFERED, AND SHOULD NOT BE CONSIDERED, AS A SUBSTITUTE FOR PROFESSIONAL DESIGN SERVICES.



US CORPORATE ADDRESS
 310 QUADRAL DRIVE
 WADSWORTH, OHIO 44281
 www.soprema.us
 Tel: 330.334.0066

PROJECT:	DRAWN BY: SOPREMA TECHNICAL SUPPORT, DWALDRON	
TITLE: ALSAN TRAFIK RS PARTIALLY REINFORCED WATERPROOFING & SURFACING TYPICAL PIPE/BOLLARD PENETRATION	NO.:	REVISION:
	DATE: 1-15-2022	DRAWING NUMBER: US.RTN.06.P01
	SCALE: NTS	

NO.:	REVISION:	DATE:
DATE: 1-15-2022	DRAWING NUMBER: US.RTN.06.P01	
SCALE: NTS		