


ECO₃ TECHNOLOGY

Smog-Reducing, Granule-Surfaced Membranes

Roofing

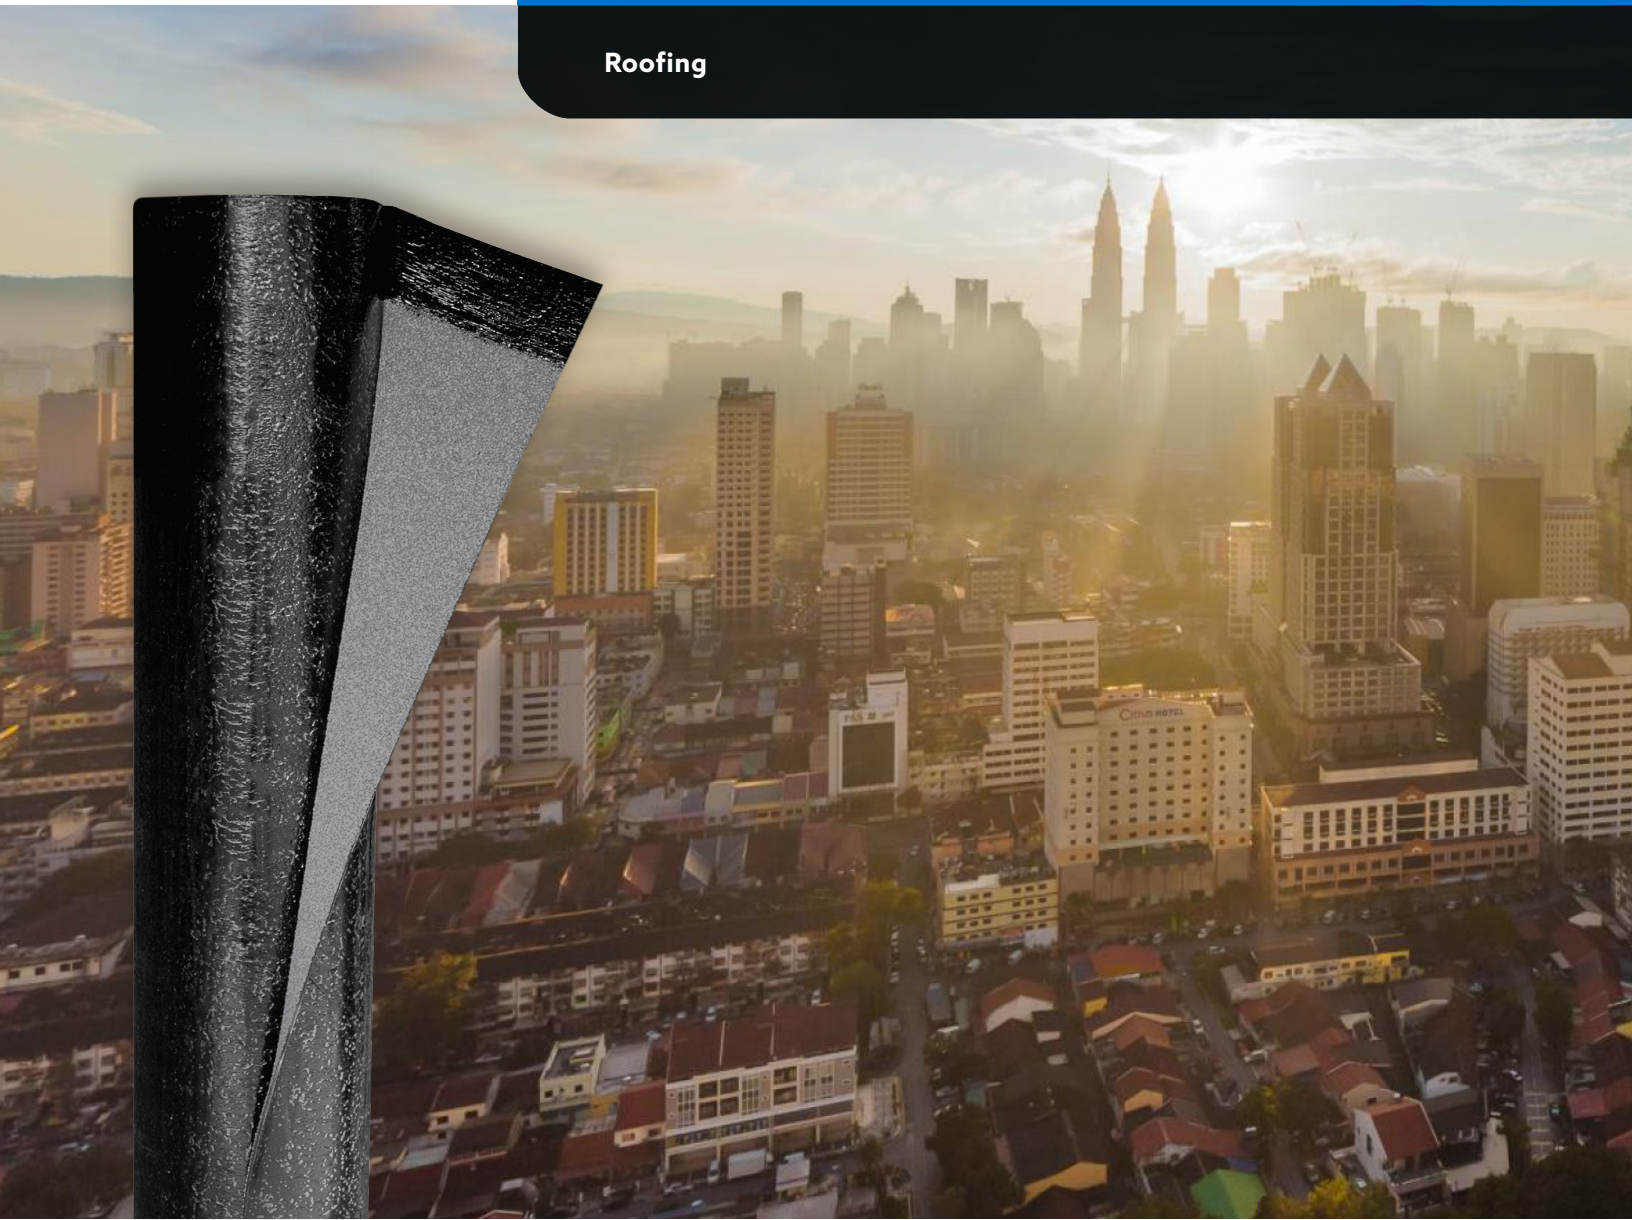

SUSTAINABLE
SOLUTION



TABLE OF CONTENTS

PAGE	CONTENT
3	WHAT ARE NITROGEN OXIDES (NO _x)?
3	WHAT ARE 3M™ SMOG-REDUCING GRANULES?
4	HOW DO 3M™ SMOG-REDUCING GRANULES WORK?
5	HOW EFFECTIVE ARE SMOG-REDUCING GRANULES AT REDUCING NITROGEN OXIDES (NO _x)?
6	WHAT SOPREMA PRODUCTS UTILIZE 3M™ SMOG-REDUCING GRANULES?
6	LEED®/ ENERGY CODE REQUIREMENTS
7	ECO ₃ AT WORK
7	ADDITIONAL RESOURCES



SOPREMA'S COMMITMENT TO SUSTAINABLE SOLUTIONS

For over 100 years, SOPREMA has been committed to the innovation and development of products that enhance performance and protect the environment. The EPA has published reports identifying dozens of cities around the country that have failed to meet National Ambient Air Quality standards for ground level ozone, or smog. SOPREMA's products aim to help the environmental efforts of reducing smog and improving air quality. 3M™ Smog-Reducing Granules were designed to do just that.

ECO₃ TECHNOLOGY

GRANULE-SURFACED MEMBRANES

What are nitrogen oxides (NO_x)?

Nitrogen oxides (NO_x) are gases formed from emissions from motor vehicles, power plants and commercial and industrial operations. These gases react with sunlight and VOCs (volatile organic compounds) in the atmosphere to create what is commonly referred to as ground-level ozone or smog. Breathing ground level ozone can create acute health problems for children, the elderly, and people of all ages with lung diseases such as asthma.




What are 3M™ Smog-Reducing Granules?

Improving Our Climate 3M™ Smog-Reducing Granules

3M Smog-Reducing Granules are ceramic-coated minerals designed to have smog-reducing capability. SOPREMA's ECO₃ granule-surfaced membranes utilize this technology for low-slope roofing applications.

These roofing granules are designed with a photo-catalytic coating layer that transforms nitrogen oxide (NO_x) into water-soluble ions that are then washed away by rainwater.

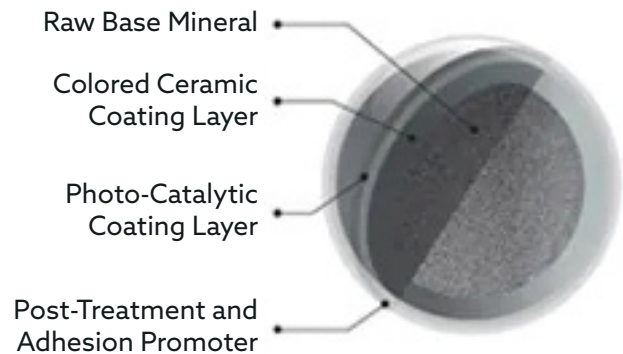


ECO₃ TECHNOLOGY

GRANULE-SURFACED MEMBRANES



- 3M™ Smog-Reducing Granules are tough, non-porous, weather and UV resistant, ceramic-coated base minerals.
- Sunlight activates the surface of the photo-catalytic granules to transform smog into water-soluble ions.
- Technology proven by 3M and Lawrence Berkeley National Laboratory (LBNL) to remove smog pollutants that come in contact with the roof

How do 3M™ Smog-Reducing Granules work?

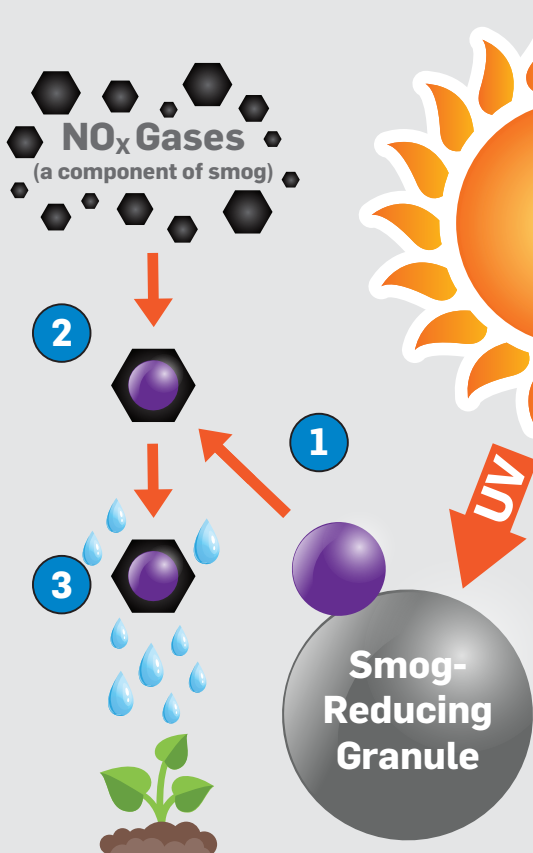

1. When exposed to the sun's rays, the photocatalytic coating on the granules generates surface-bound radicals.
2. Nitrogen oxides react with these radicals and create nitrate salt; a plant-usable form of nitrogen.
3. The low level nitrate deposits are then washed away by rainwater or dew.



ECO₃ TECHNOLOGY

GRANULE-SURFACED MEMBRANES

How effective are smog-reducing granules at reducing nitrogen oxides (NO_x)?

ENVIRONMENTAL BENEFITS

- We know that trees have a natural ability to clean the air. ECO₃ granule-surfaced membranes contribute to cleaner, healthier communities with technology inspired by the power of trees.
- Every 500 ft² of roofing membrane is equivalent to approximately three mature trees.
- A 20,000 ft² (1859m²) roof covered with ECO₃ granule-surfaced membranes has the ability to offset approximately 8,000 miles worth of car emissions yearly. That is the power of 120 trees!



- The smog fighting ability of the granules is not consumed, but is maintained over the life of the roof.



TESTING & VALIDATION

Lawrence Berkeley National Laboratory testing validated the efficacy of this material in reducing smog and contributing towards air purification. Calculations were prepared on the performance equivalence of trees which naturally clean the air.

**This calculation varies depending on sunlight, humidity, and levels of NO_x in the atmosphere.*

ECO₃ TECHNOLOGY

GRANULE-SURFACED MEMBRANES

What SOPREMA products utilize 3M™ Smog-Reducing Granules?

SBS-MODIFIED BITUMEN



ELASTOPHENE®
FLAM FR GR ECO₃



03805 03806

ELASTOPHENE®
FR GR ECO₃



01103 01104

SOPRALENE®
FLAM 180 FR GR ECO₃



03942 03948

SOPRALENE®
180 FR GR ECO₃



01323 01324

APP-MODIFIED BITUMEN



DERBICOLOR®
P-FR ECO₃

56225


DERBICOLOR®
GP-FR ECO₃

56045

DERBICOLOR®
XPS-FR ECO₃

56226

LOOSE GRANULES



G03942

G03948

3M™ SMOG-REDUCING
GRANULES PAIL

LEED®/Energy Code Requirements

A modified bitumen roof with a cap sheet membrane surfaced with SMOG reducing granules can contribute LEED® points under LEED® v4.1 as part of an overall project strategy - (IN) Innovation - Technology Category.



ECO₃ TECHNOLOGY GRANULE-SURFACED MEMBRANES

ECO₃ at Work

DALLAS FORT WORTH AIRPORT — DALLAS (TX)

Design: PGAL Inc., Addison, TX


Construction: Chamberlin Roofing and Waterproofing

SOPREMA® Products: ELASTOPHENE® and SOPRALENE®

Terminal F Skylink buildings - 74,000 ft² of ELASTOPHENE® - two-ply SBS-modified bitumen and 11,000 ft² of SOPRALENE® for flashing, the equivalent of approximately 510 trees.

SOPREMA ECO₃ GRANULE-surfaced membranes were specified due to a desire to improve the air quality surrounding the airport. This is a continual process with the photocatalytic activity occurring when exposed to sunlight. The smog-reduction does not lessen over the life of the roofing material so the environmental benefit is long-lasting.

Photo credit: Smily N. Pool

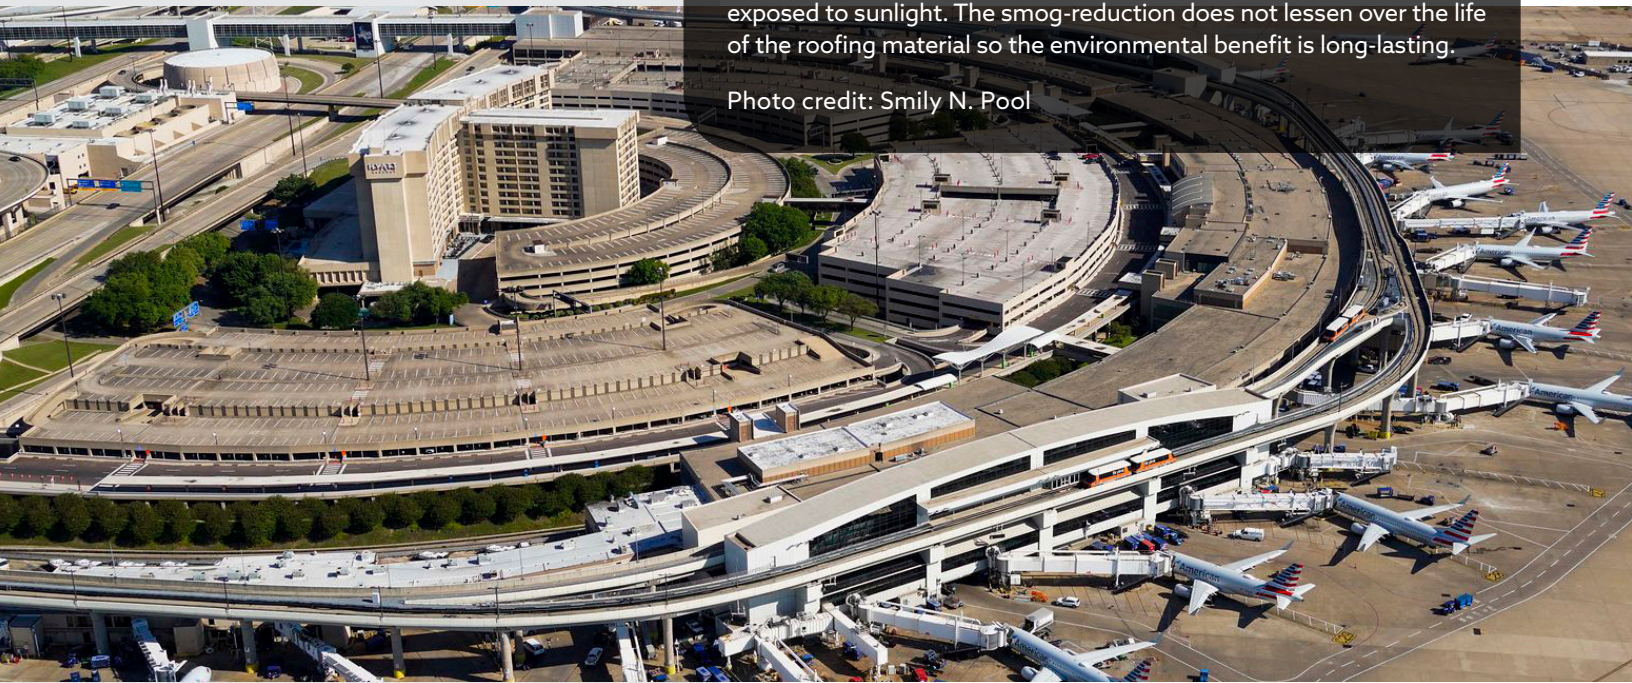

Additional Resources

CLICK ON TITLES TO
ACCESS INFORMATION



LBNL STUDY

<https://escholarship.org/content/qt96h6m5rv/qt96h6m5rv.pdf>



3M PRESS RELEASE

<https://news.3m.com/2018-06-28-3M-TM-Smog-reducing-Granules-Harness-the-Power-of-the-Sun-to-Improve-Air-Quality>



PRODUCT INFORMATION

<https://soprema.us/elementor-41305/>



PRODUCT VIDEO

<https://youtu.be/-h7dCS5RQVA>

*3M is a trademark of 3M Company.



REV. 241105

