
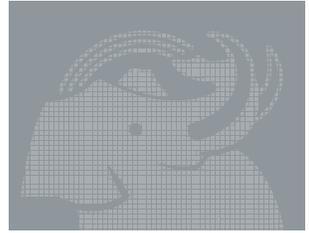


# ALSAN<sup>®</sup> PRE-CUT FLEECE

Non-woven Polyester Reinforcement

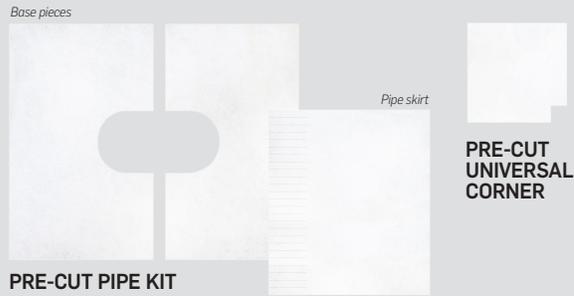

APPLICATIONS

ROOFING

WATERPROOFING

PRODUCT DATA SHEET PDS10250 - REV 230831

## PRODUCT NUMBERS:

- 45163 - **Large Pipe Kit - 10/Box**
- 45164- **Small Pipe Kit - 10/Box**
- 45165- **Universal Corner - 20/Box**

## DESCRIPTION & FEATURES:

**ALSAN PRE-CUT FLEECE** is a polyester fleece reinforcement that is pre-cut to fit typical roofing and waterproofing details. Convenient and ready to install, pre-cut fleece kits are designed to improve productivity while reducing product waste. **ALSAN PRE-CUT FLEECE** kits are available for small and large pipe penetrations and corner installation. **ALSAN PRE-CUT FLEECE** is designed to be used with ALSAN RS and ALSAN TRAFIK RS resins as well as ALSAN Flashing.

## APPLICATION:

Please refer to SOPREMA Technical Services published installation instructions for specific pre-cut fleece product.

## STORAGE:

When not in use, store fleece in a sealed wrap or container to protect from contaminants. Fleece is specifically designed to absorb liquid membrane components. Exposure to moisture (rain, condensation, high humidity, etc.) dust, dirt and debris will compromise and may cause failure of the finished application. Contaminated fleece **MUST** be disposed of and replaced.

## LIMITATIONS:

**ALSAN PRE-CUT FLEECE** should not be used with Alsan Coating or COLPHENE LM BARR Products.

## TESTING & APPROVALS:





## WARRANTY:

For more information refer to [www.SOPREMA.us](http://www.SOPREMA.us) or contact your SOPREMA representative.

# ALSAN<sup>®</sup> PRE-CUT FLEECE

Non-woven Polyester Reinforcement

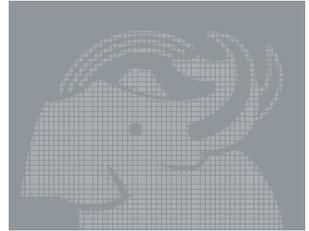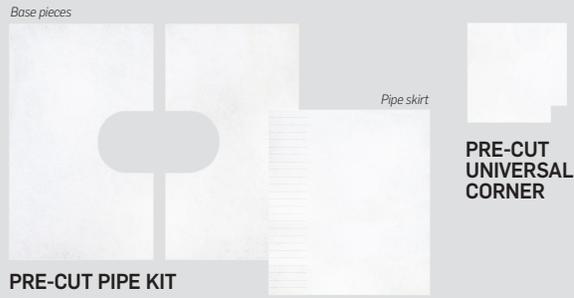

APPLICATIONS

ROOFING

WATERPROOFING

PRODUCT DATA SHEET PDS10250 - REV 230831

## TECHNICAL INFORMATION & TESTING:

SHEET PROPERTIES		
PROPERTY	VALUE	ASTM
<b>Material</b>	Non-woven polyester	-
<b>Color</b>	White	-
<b>Thickness, mil (mm)</b>	25 (0.65)	D1777
<b>Weight, oz/ft<sup>2</sup> (g/m<sup>2</sup>)</b>	0.36 (110)	D5035

DIMENSION & MASS			
PROPERTY	DESCRIPTION / USE	DIMENSIONS	QTY/BOX
<b>Small Pipe Kit</b>	Designed for use on pipe penetrations with a diameter between 1/2 to 3 inches	<b>3 pre-cut pieces:</b> 2 base pieces (10.5 inches x 19 inches) & 1 pipe skirt (11 inches x 12 inches)	10
<b>Large Pipe Kit</b>	Designed for use on pipe penetrations with a diameter between 4 to 8 inches	<b>3 pre-cut pieces:</b> 2 base pieces (13 inches x 24 inches) & 1 pipe skirt (11 inches x 12 inches)	10
<b>Universal Corner</b>	Designed to work for both inside and outside corner applications	6 inch square	120

PHYSICAL PROPERTIES			
PROPERTY	MD	XMD	ASTM
<b>Tensile strength, lb/in (kN/m)</b>	53 (235)	59 (260)	D5035
<b>Elongation, %</b>	70	80	D5035

Data is represented by typical values, unless noted otherwise.