NOTE:
SIZE WIDTH OF DE-BONDING TAPE TO PROVIDE UN-ADHERED AREA MINIMUM 5 TIMES LARGER THAN THE MAXIMUM ANTICIPATED EXPANSION. MEMBRANE COVER STRIP MUST EXTEND PAST DE-BONDING TAPE 2" MINIMUM ALL SIDES (TYP.)

THIS DETAIL SHOULD BE USED FOR CRACKS HAVING 1 TO 3 mm MOVEMENT ONLY. CRACKS WITH MOVEMENT GREATER THAN 3 mm MUST BE TREATED AS AN EXPANSION JOINT.

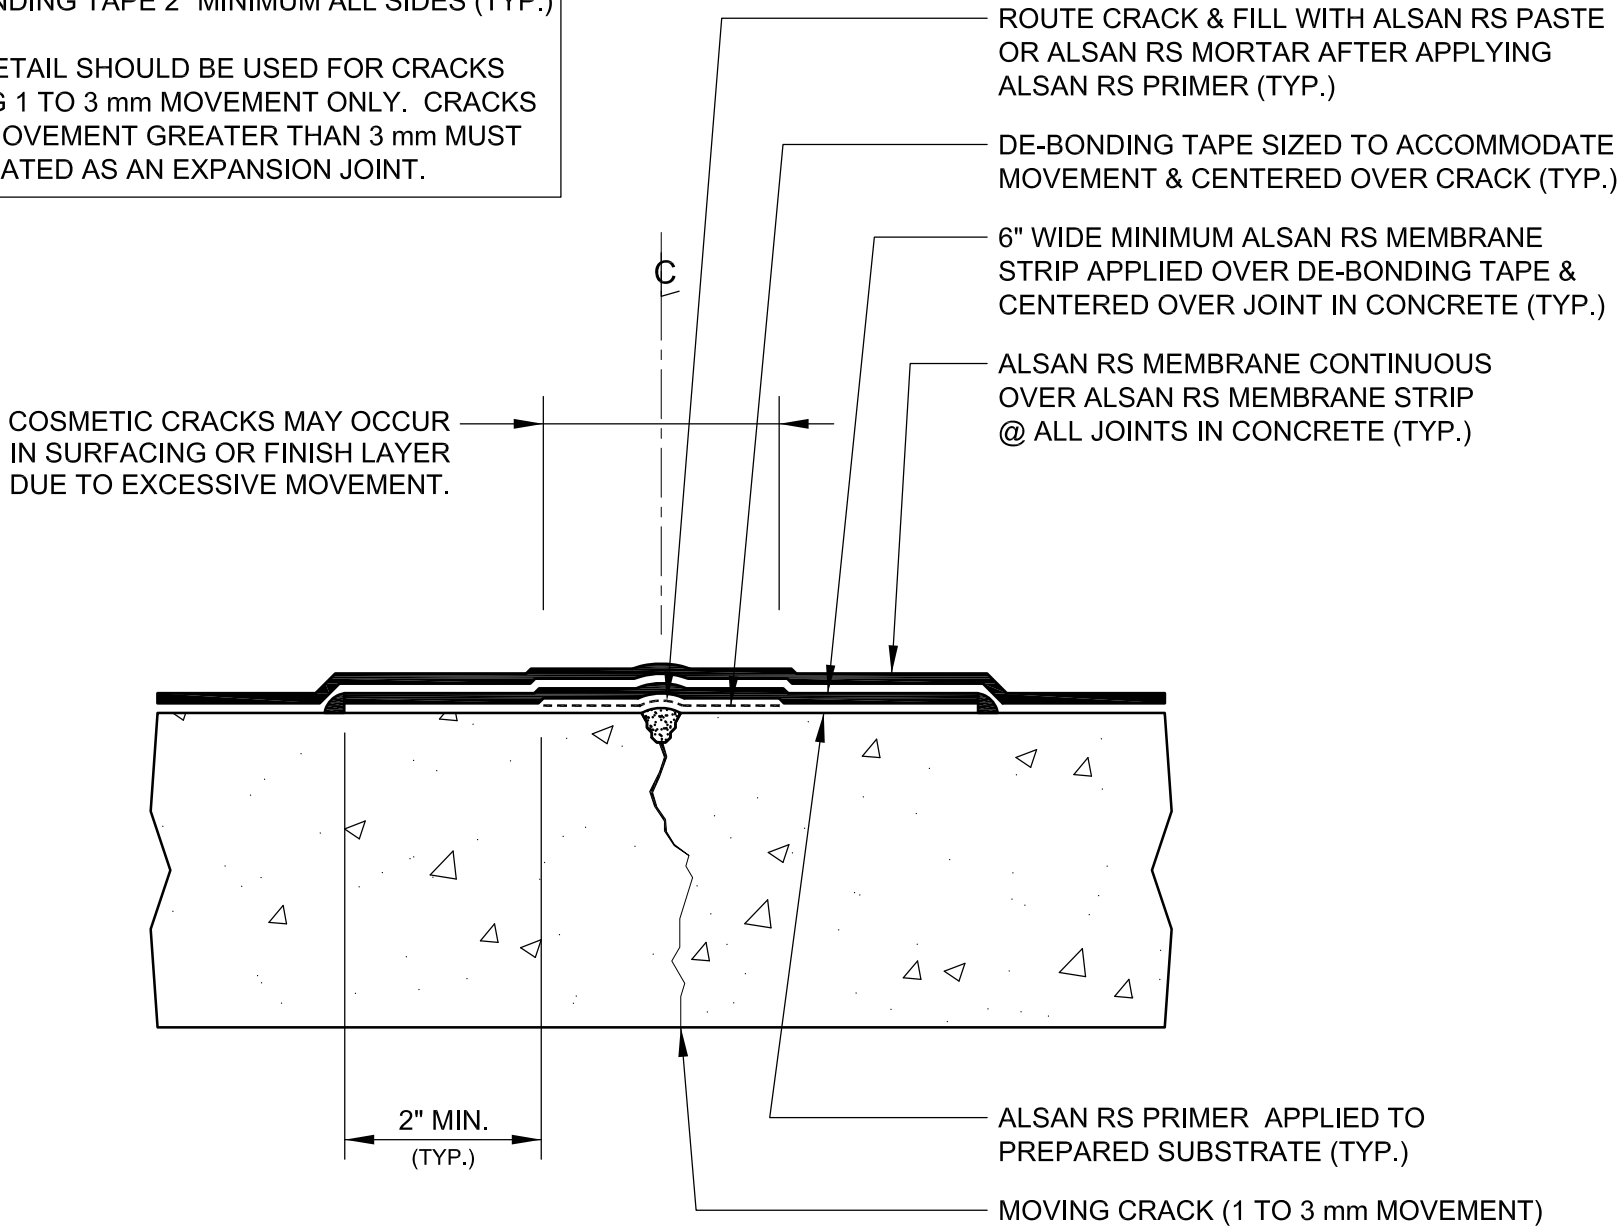

NOTE: REFER TO SOPREMA RELATED PUBLISHED DOCUMENTATION, PRODUCT DATA SHEETS (PDS) & SAFETY DATA SHEETS (SDS) FOR ADDITIONAL INFORMATION. ALL DETAIL DRAWINGS & RELATED INSTALLATION GUIDELINES ARE PROVIDED BY SOPREMA FOR THE SOLE PURPOSE OF SOPREMA WARRANTY QUALIFICATION. ACCORDINGLY, ANY DETAILS DRAWINGS PROVIDED ARE NOT OFFERED AND SHOULD NOT BE CONSIDERED A SUBSTITUTE FOR PROFESSIONAL DESIGN SERVICES. USAGE OF THIS DRAWING IS GOVERNED BY THE TERMS OF SERVICE FOR SOPREMA DETAIL, PLEASE CONSULT THESE TERMS OF SERVICE PRIOR TO UTILIZING THIS DRAWING.

DRAWING NO.: **RS-J1C**

RSP_J01C

ALSAN RS WATERPROOFING MEMBRANE MOVING (1 to 3mm MOVEMENT) CRACK REPAIR

REVISION	ISSUE DATE	SCALE	DRAWN BY
0	12-15-2018	N.T.S.	DRW

310 QUADRAL DRIVE
WADSWORTH, OHIO 44281
(330) 334-0066

SOPREMA®